




# RMQ16 System Overview

Pushbuttons and Stacklights

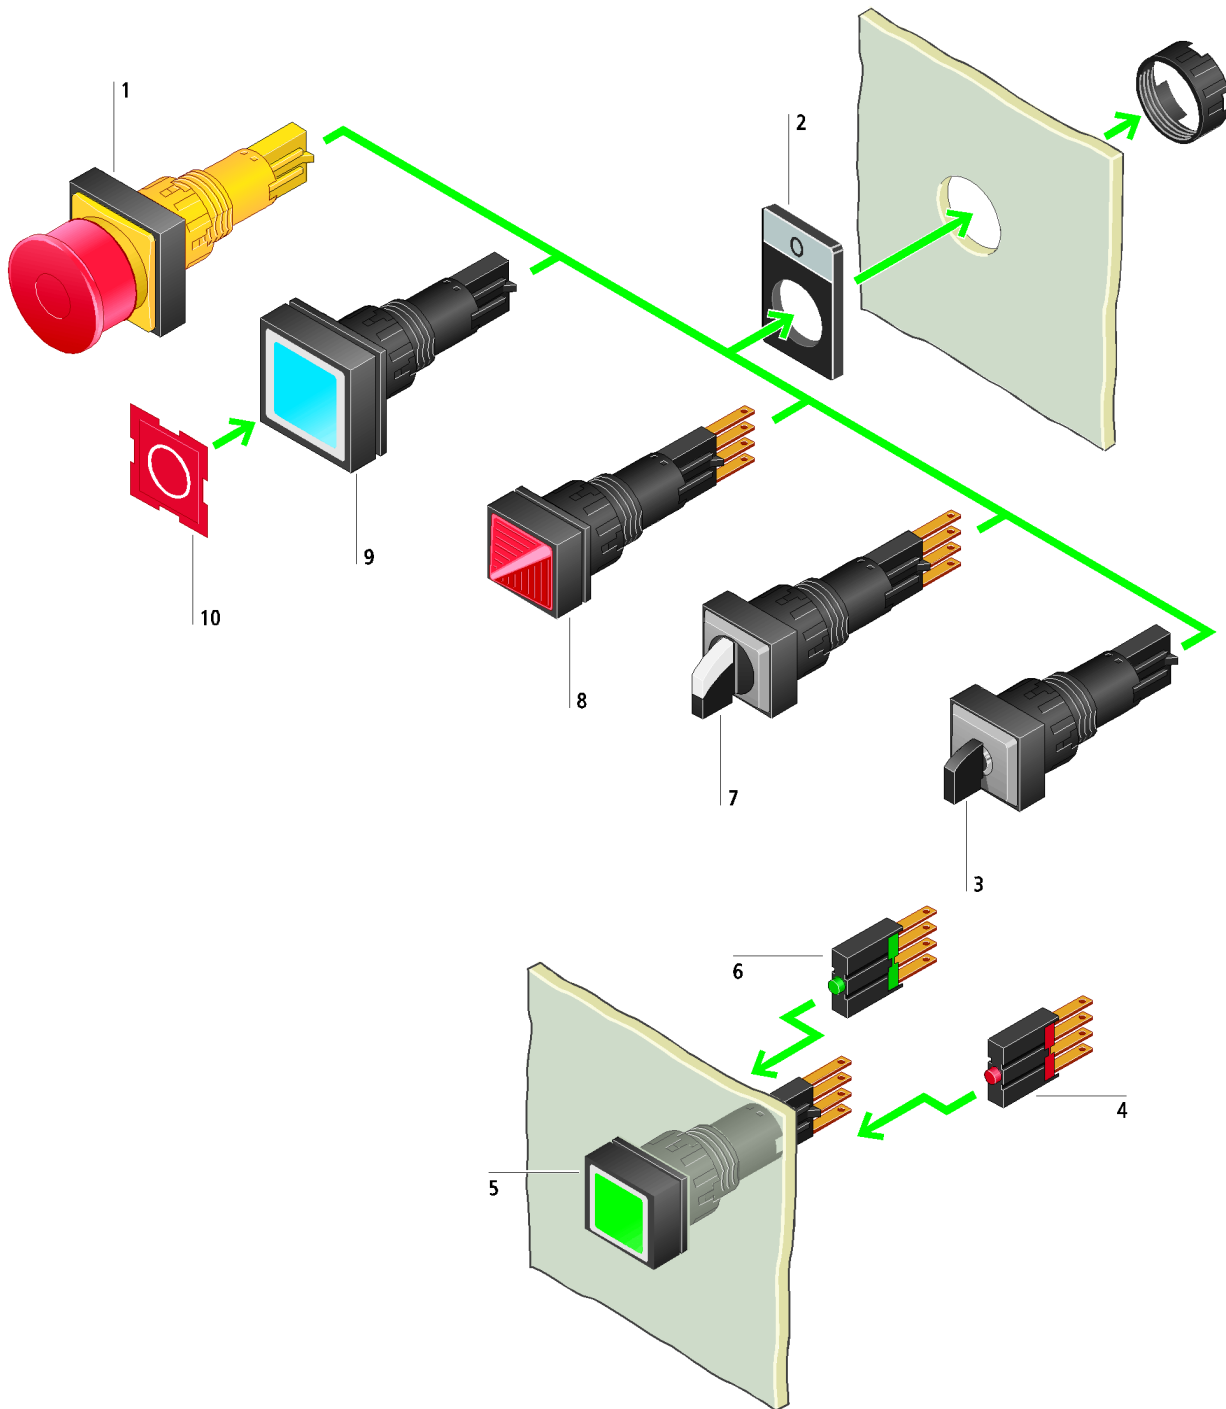

## RMQ16 System Overview

<p><b>Emergency-Stop pushbuttons</b> 1</p> <p>Tamper proof to ISO 13 850/EN 418</p> <hr/> <p>Illuminated and non-illuminated</p> <p>Additional plates with and without text</p> <hr/> <div style="display: flex; justify-content: space-around;">   </div> <hr/> <p>→ Page 05//057</p> <hr/> <p><b>Legend plates</b> 2</p> <p>For insert plates</p> <p>Color: light gray, black, yellow</p> <p>Insert plates with and without text</p> <hr/> <p>→ Page 05/062</p> <hr/> <p><b>Key-operated selector switches</b> 3</p> <p>Two or three positions</p> <p>Switching angle 45°</p> <p>Spring-return and maintained</p> <p>Various lock mechanisms</p> <hr/> <p>→ Page 05/052</p>	<p><b>N.C. contact element (red)</b> 4</p> <p>With blade terminal</p> <p>Universal contacts suitable for use with electronic devices</p> <p>Positive opening safety function to IEC/EN 60 947-5 -1</p> <hr/> <p>→ Page 05//050</p> <hr/> <p><b>Illuminated pushbutton operators</b> 5</p> <p>Momentary and maintained</p> <p>Interchangeable insert plates</p> <p>Colors: white, green, red, yellow, blue</p> <hr/> <p>→ Page 05/051</p> <hr/> <p><b>N.O. element (green)</b> 6</p> <p>With blade terminal</p> <p>Universal contacts suitable for use with electronic devices</p> <hr/> <p>→ Page 05/050</p> <hr/> <p><b>Selector switch operators</b> 7</p> <p>Two or three position</p> <p>Switching angle 45°</p> <p>Spring-return and maintained</p> <p>Illuminated selector switch operators with integral lamp socket</p> <p>Colors: white, green, red</p> <hr/> <p>→ Page 05/052</p>	<p><b>Indicating lights</b> 8</p> <p>Flush and conical versions</p> <p>Integral lamp socket</p> <p>For filament bulbs and LEDs</p> <p>Colors: white, green, red, yellow, blue</p> <hr/> <p>→ Page 05/056</p> <hr/> <p><b>Pushbuttons</b> 9</p> <p>Momentary and maintained</p> <p>Interchangeable button plates</p> <p>Colors: white, green, red, yellow, blue, black</p> <hr/> <p>→ Page 05/050</p> <hr/> <p><b>Button plates/insert plates</b> 10</p> <p>Abrasion-proof button plates for push-button operators</p> <p>Transparent insert plates for illuminated push-button operators and indicating lights</p> <p>With and without text</p> <p>With standard texts and symbols</p> <hr/> <p>→ Page 05/058</p>
---	---	---

### Product features

- Front dimension and minimum grid dimensions 18 × 18 mm or 25 × 25 mm
- Mounting diameter 16.2 mm to EN 50 007
- Degree of protection NEMA 13, IP65
- Switching of different potentials
- Can be used with electronic devices to IEC/EN 61 131-2
- Technical data to IEC/EN 60 947-5-1
- Approved throughout the world